

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/000466 A1

- (51) International Patent Classification⁷: **B04B 7/14**, F16F 15/20
- (21) International Application Number: PCT/SE2003/001048
- (22) International Filing Date: 19 June 2003 (19.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0201883-6 19 June 2002 (19.06.2002) SE
- (71) Applicant (for all designated States except US): 3NINE AB [SE/SE]; P.O. Box 1163, S-131 27 Nacka (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): SANDGREN, Martin [SE/SE]; Riddargatan 25, S-114 57 Stockholm (SE).
- (74) Agent: ALBIHNS STOCKHOLM AB; P.O. Box 5581, Linnégatan 2, S-114 85 Stockholm (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ROTATION BODY ARRANGEMENT

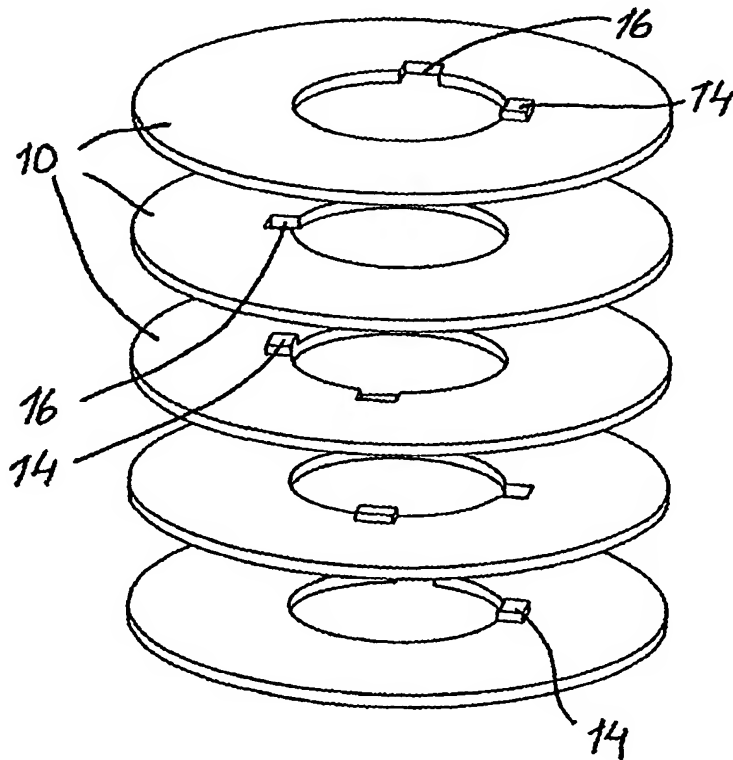

(57) Abstract: The invention relates to an arrangement comprising a rotational body rotatable about a longitudinal centre axis and composed of a plurality of identical adjacent elements (10). The elements are fixed relative to each other in the circumferential direction and are separated axially. For balancing of the rotational body, the elements (10) each have, on one side, an axially directed projection (14) and, on its reverse side, a notch (16), which is angularly displaced a certain amount from the projection (14) in the circumferential direction of the element.